

100 % Leak Proof



Seal-less Magnetic Drive Chemical Pumps

Series CFM in SS 316 Construction



All pumps made from SS 316 Steel

Seal-less Design with 100% Leak Proof operation

No Shaft Seal & Hence No maintenance down time

Ideal for transfer, loading & unloading of Chemicals,

Food grade liquids, Toxic and Fuming liquids

Available in Std. Motor and with Flame Proof Motors also

Permanent High power Rare Earth Magnets

A Quality Product from


TAHA INDUSTRIES

An ISO 9001-2008 Regisetred Company



Performance Chart for CFM Series Pumps @ 2900 RPM in Water

MODEL	Size (S x D)	HP	Head in Mtrs / Capacity in LPM															
			4	6	8	10	12	16	20	24	28	30	32	36	40	45	50	55
CFM 01	12 X 12	0.75	30	18	6													
CFM 02	25 X 25	1	100	76	51	24	5											
CFM 03	25 X 25	2			162	137	110	83	57	16								
CFM 3A	40 X 40	2			220	192	153	95										
CFM 4B	50 X 40	2				240	212	146	72									
CFM 5A	50 X 40	3							205	144	86	25						
CFM 5B	50 X 50	3				300	246	165	98									
CFM 6A	50 X 40	5							215	275	144	90	58	22				
CFM 6B	65 X 50	5				350	322	264	205	140								
CFM 7A	50 X 40	7.5								285	250	214	180	145	108	70		
CFM 7B	65 X 50	7.5						575	480	430	315	260	205	130				
CFM 7E	80 X 65	7.5						700	580	460	300							
CFM 8A	50 X 40	10										270	245	200	162	125	85	
CFM 8B	65 X 50	10						785	700	617	542	505	465	352	250			
CFM 8E	80 X 65	10						850	655	502	350							
CFM 9A	50 X 40	12.5							500	448	400	377	351	300	252	202	152	90
CFM 9B	65 X 50	12.5										700	650	590	425	360		
CFM 10A	80 X 65	15							840	800	760	744	725	640	564	455		
CFM 11A	65 X 50	20											850	800	750	700	650	600
CFM 11B	80 X 65	20										950	915	880	812	752	705	

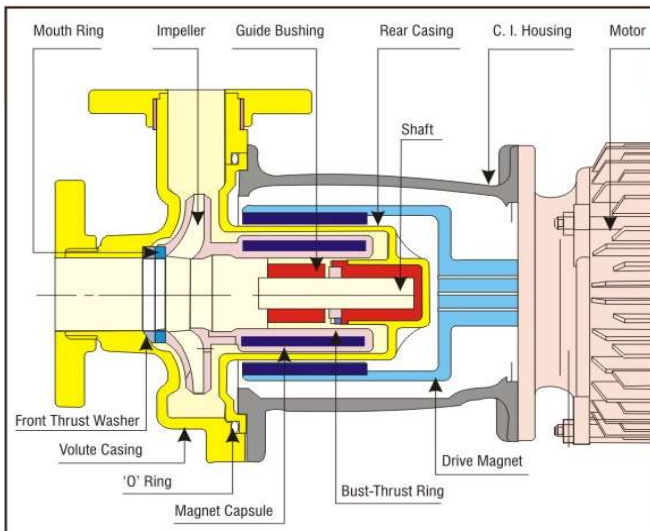

Permanent High Power Rare Earth Magnets

Bushes made from Carbon Filled Teflon or Rulon

Shaft of SS 316

Casing Gasket of Viton or PTFE

Max. Operating Temp. 100 deg C

Flange Connections as per ANSI 16.5 Class 150

For more details please contact :

Aziz 9825829875, tahaindustries52@gmail.com

www.tahaindustries.com