


All Stainless Steel Centrifugal Sanitary Pumps



MOC in SS-316 & SS-304

Series CFS

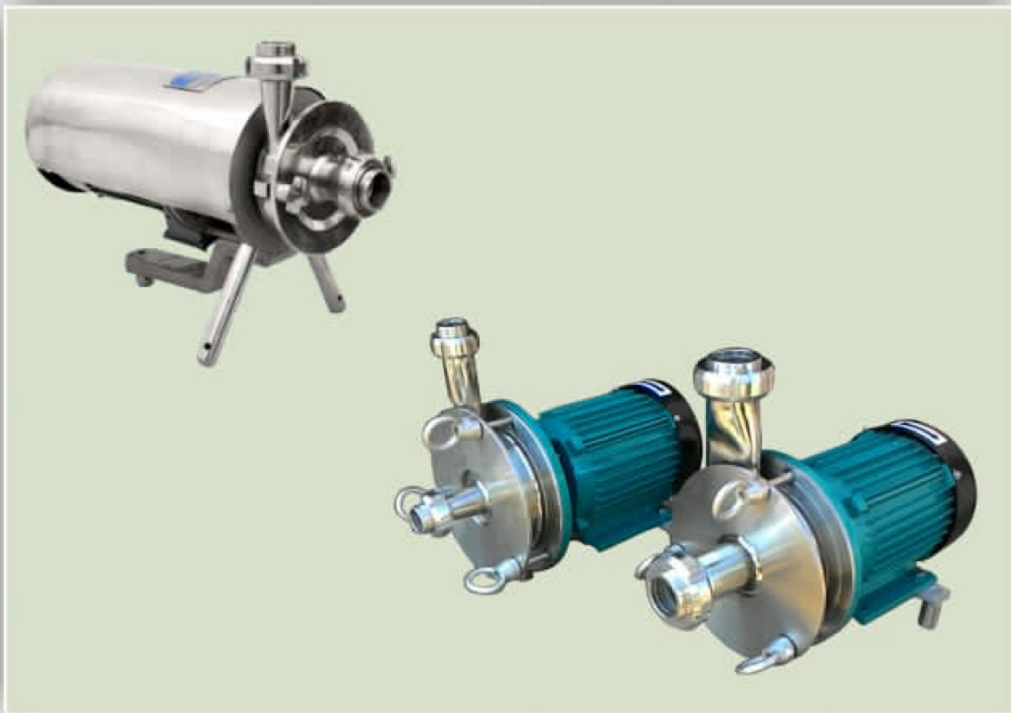

Useful for :-



Milk



Dairy Products



Beverages



Syrups



Alcohol

A Quality Product From :

Taha Industries

An ISO 9001-2008 and CE Registered Company.

Features

CFS Series Pumps are centrifugal type Pumps with CIP design. Made From food grade. SS-316/SS-304 sheet metal with polished internal surface for use in food, dairy and Pharma industry. Specially designed semi open impeller to avoid liquid churning and give smooth flow.


Compact design and easy to maintain.

Motor mounted on ball foot or SS stand as required

Motor Covered with SS Canopy to give cleaner look and operation.

Application :

- Milk, Cream, Butter Milk Condensed Milk.
- Fruit Juice, Sugar Syrup.
- Vitamin Solutions, Sugar & Confectionery.
- RO WATER, DM Water, Pure Water, Water for injection (WFI)
- Vegetable Oil, Mineral Oil, Lub Oil etc.
- Pharmaceutical Formulation, Syrup etc.
- Alkaline Solution / Alcoholic Drinks.
- Acids, Fine Chemicals.
- Bottling Plants, Soft Drinks & Distillery.
- Food Processing / Liquid Food stuffs.
- Colour dyes and Pigments/ Paints.
- Descaling Applications, Paper & Cement Industries.
- Water Treatment Plants .
- Detergent, Soaps, Paste & Shampoo.
- Textile Sizing, Dyeing & Finishing Systems.
- Natural Cellulose Fiber /Synthetic Fiber System.
- Hot & Cold Water Pumping.

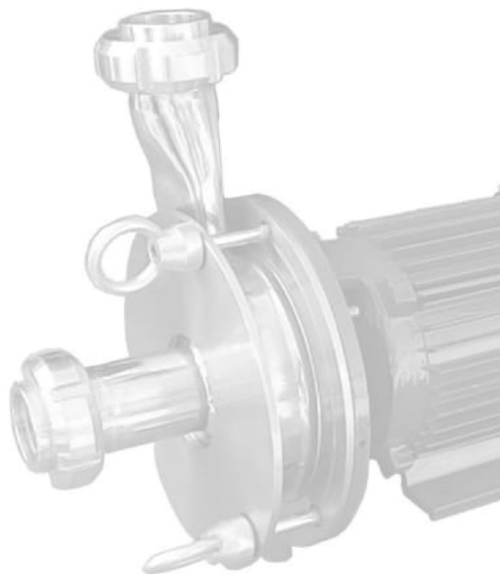

Range :

MODEL	H.P.	SIZE	HEAD IN METERS DISCHARGE IN LPM AT 2900 RPM													
			4	6	8	10	12	14	16	18	20	22	24	26	28	30
CFS-2	0.5	25 x 25		100	90	80	60	40								
CFS-2 A	0.5	40 x 40			200	140	75	20								
CFS-3	1	25 x 25			170	150	130	110	90	70	50	25				
CFS-3 A	1	40 x 40			250	225	190	150	100	50						
CFS-4 A	1.5	40 x 40						170	150	125	100	60	20			
CFS-4 B	1.5	50 x 40					250	220	180	135	90	30				
CFS-5 A	2	50 x 40							250	225	195	160	120	70	20	
CFS-5 B	2	50 x 50					300	270	225	170	120	60				

MODEL	H.P.	SIZE	HEAD IN METERS DISCHARGE IN LPM AT 2900 RPM													
			6	8	12	16	20	24	28	32	36	40	45	48	54	56
CFS-6 A	3	50 x 40				230	200	160	120	80	40					
CFS-6 B	3	65 x 50			370	320	250	190	110	30						
CFS-7 A	5	50 x 40							270	235	200	150	100			
CFS-7 B	5	65 x 50			650	570	480	380	250	120						
CFS-8 A	7.5	50 x 40							320	260	210	165	110	50		
CFS-9 B	7.5	65 x 50					750	620	500	380	220	100				

Intel/Outlet Type : SMS Union / Triclove Union / Triclove Ferrule

Mechanical Seal : Single Spring internal Seal with. Sic/Sic or TC/TC Face combination.

0.5 & 1HP Pumps available in 1Ø & 3Ø. 1.5 HP and above available in 3Ø only.